


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 14 TOWNSHIP 17 RANGE 4
DATE: 9-7-02
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 8-11-97

IN. S.P.C. E ZONE NAD '83
NAME: 17041402
N: 519484.7490(m)
E: 67930.1720(m)

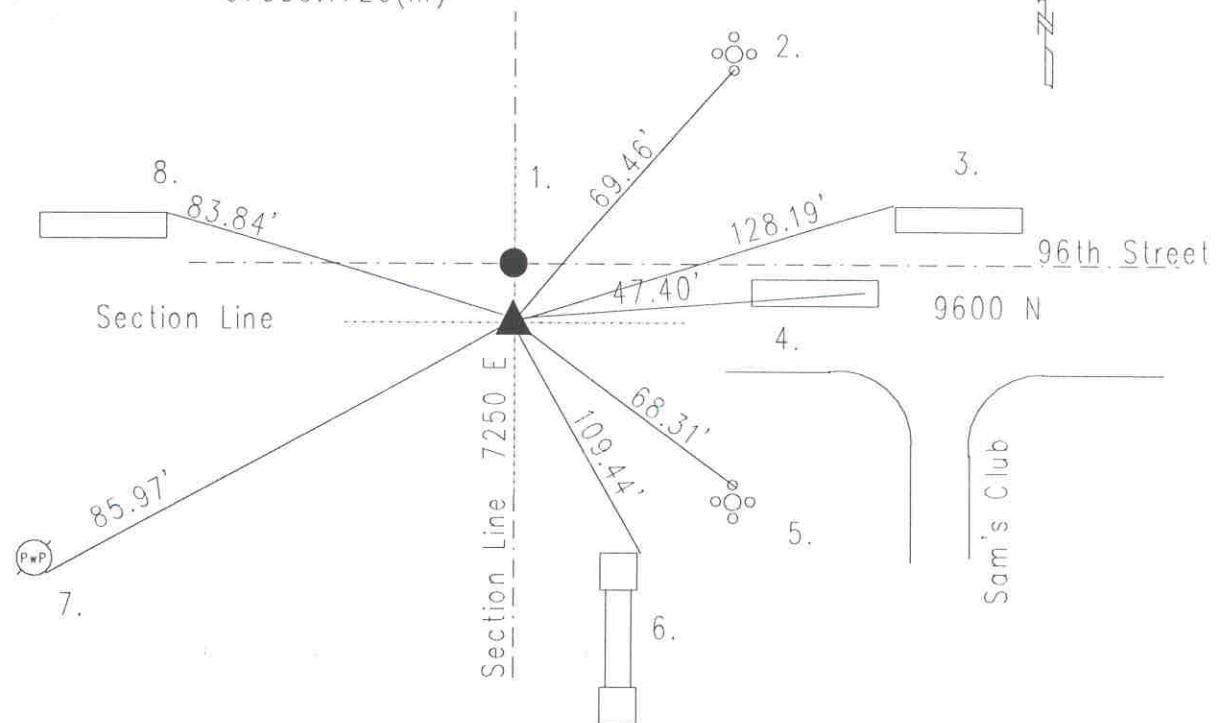

Original post set 1821 by Laughlin with witness: 8" _____ S 66 E 23 links;
4" buckeye N 71 W 16 links per Marion County Atlas pg. 12. Hosbrook 12-18-1849
called stone set, the stumps of both original witness trees were found per
Lawrence Township Legal Survey Book pg. 2. 4-23-76 called stone 10" down.
7-9-80 called PK nail set at surface over stone per Cleveland. Excavated 7-23-86
stone found 24" down. Harrison set. Re-tied 7-17-96 by Kiste. Re-tied 11-20-96,
by Wilcoxon. Re-tied 8-11-97 by Wilcoxon. Re-tied 9-7-02 by Wilcoxon.
17041402

REF.	DISTANCE	DESCRIPTION
1.	4.96'	Due N to brass plug in concrete
2.	69.46'	Cut 'x' S-bolt of aluminum pole base
3.	128.19'	Cut 'x' NW corner of inlet
4.	47.40'	Cut 'x' in concrete median
5.	68.31'	Cut 'x' N bolt light pole base MENARDS
6.	109.44'	NE corner of brick sign post
7.	85.97'	Mag nail w/brass washer SE PwP#37-178 B
8.	83.84'	Cut 'x' NE corner of inlet